

PENDANT FIXTURE INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Put the fixture wire through the pipes (Adjust the length needed with different lengths of tubes (1x3", 1x6", 4x12") and coupling, screw them on the shade together one by one.
2. Attached ceiling pan, reinforcing plate and washer to the coupling, secure them with butterfly screws.
3. Secure the cross bar with screws to the outlet box.
4. Screw the nipple into the middle hole of the cross bar with washer and hex nut.
5. Pull out the outlet wire and ground wire from the outlet box. Make wire connections:
 - Ribbed wire(w/o marking) from light to White Wire from power source.
 - Smooth wire(w/ marking) from light to Black Wire from power source.
 - Loop the Ground Wire to cross bar with a Green Screw.
6. Raise the ceiling pan and let the nipple go through the middle hole of ceiling pan till it against the outlet box, secure with hex nut and ball nut.
7. Thread the nipple to the connector in the shade, attach the glass diffuser, plastics washer, metal washer to nipple, then screw with the hex nut.
8. Attach the bottom cover to the nipple, tighten with finial.

INSTALLATION IS NOW COMPLETED.

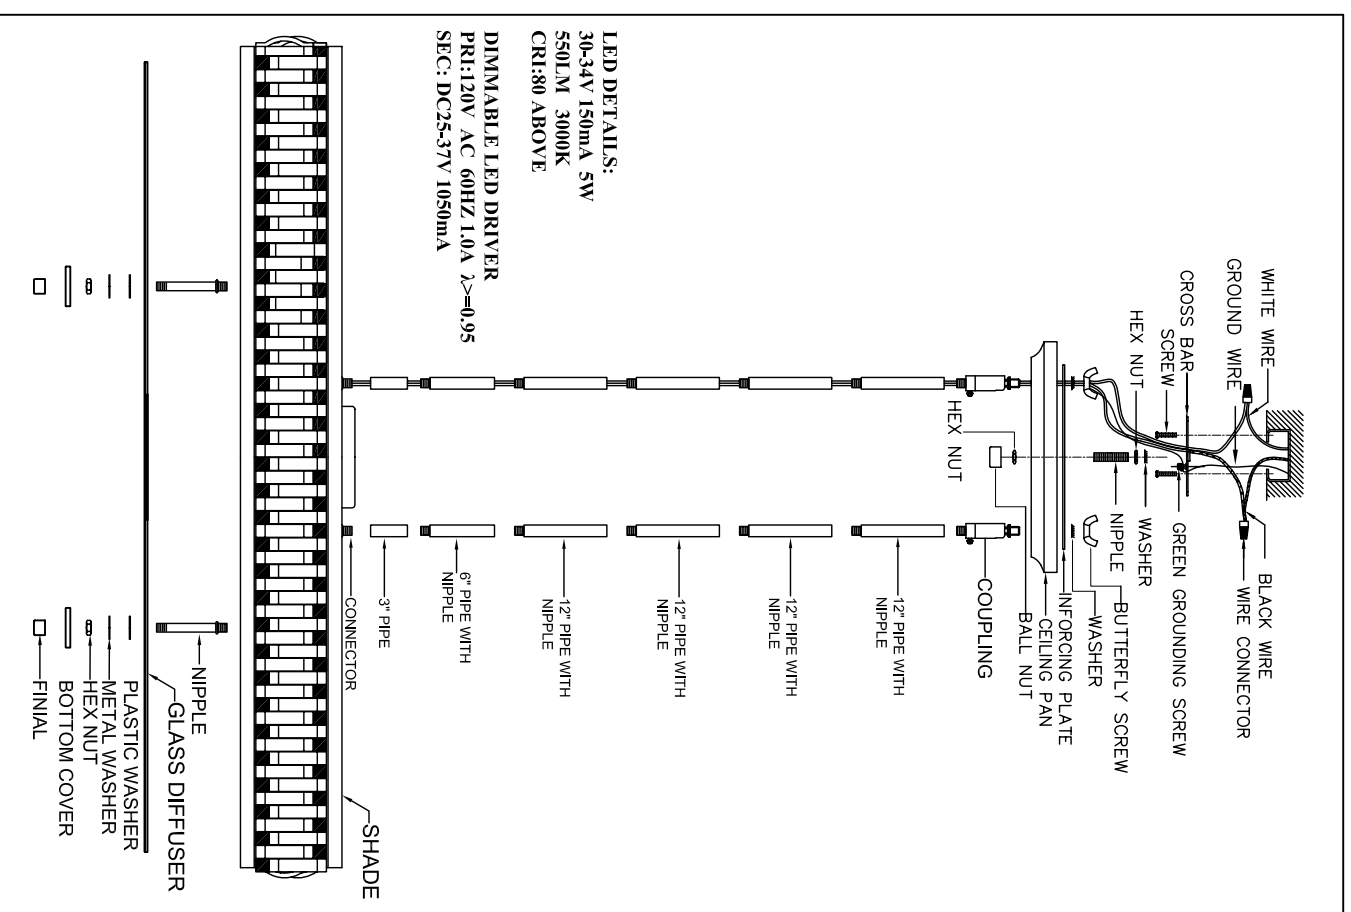

FOR ITEM 2008-35CH-LED